


## Green Pin® Guided Pin ROV Shackle with D Handle – GPROV5362D

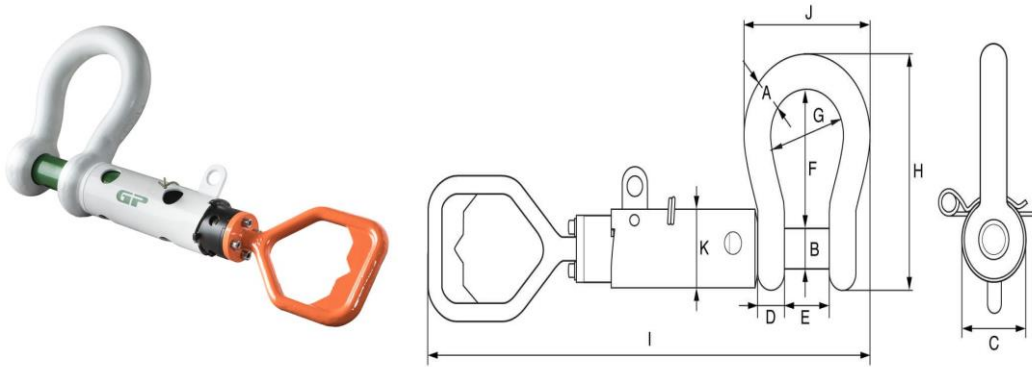

- Grade 8 polar quality alloy steel body and pin, quenched and tempered.
- White painted body and green painted pin.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -60°C up to +200°C.
- Supplied without wires; design your own wiring plan.
- Certification available **2.1** **3.1** **DoC**

# P-5362D

The next level in retrieve and release ROV operations. The Green Pin ROV Guided Pin Shackle ensures a 100% straight alignment of the shackle pin towards the shackle eyes and is always ready to use as it is delivered completely assembled. A lifting eye on the guiding tube helps the ROV operator to balance the shackle and guarantees that the pin cannot fall out of the tube. The Green Pin ROV Guided Pin Shackle further improves safety through its innovative locking system

which prevents the shackle pin from accidentally turning counterclockwise and coming loose. The shackle is available with a D-handle or Fishtail-handle.

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I - Closed	I - Open	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPROV5362D12	12	32	35	72	32	51	115	83	201	569	652	147	83	10
GPROV5362D17	17	38	42	88	38	60	146	99	249	612	710	175	83	14
GPROV5362D25	25	45	50	103	45	74	178	126	300	683	802	216	83	19
GPROV5362D35	35	50	57	111	50	83	197	138	331	711	844	238	83	24
GPROV5362D42.5	42.5	57	65	130	57	95	222	160	377	785	937	274	102	34
GPROV5362D55	55	65	70	145	65	105	260	180	433	824	994	310	102	45