




## Green Pin® Spring Release ROV Shackle – GPROV5367

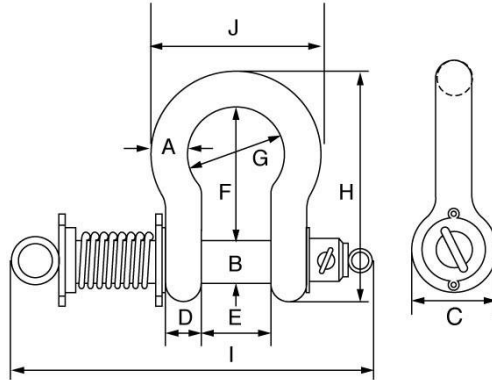

- Grade 8 polar quality alloy steel body and pin, quenched and tempered.
- White painted body and green painted pin.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -40°C up to +200°C.
- This shackle is assembled with wire rope slings and monkey's fist for size starting from W.L.L. 42.5t up to and including 150t.
- A special compression tool (sold separately) is required to assembly the shackle.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **DoC** **LROS**

# P-5367

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	Weight	Technical
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	Specification
GPROV536712	12	32	35	72	32	51	115	83	201	291	147	5.24	<a href="#">Download</a>
GPROV536713.5	13.5	35	38	80	35	57	133	92	227	301	162	7	-
GPROV536717	17	38	42	88	38	60	146	99	249	360	175	9.25	<a href="#">Download</a>
GPROV536725	25	45	50	103	45	74	178	126	300	370	216	15.5	<a href="#">Download</a>
GPROV536735	35	50	57	116	50	83	197	138	334	400	238	20.4	-
GPROV536742.5	42.5	57	65	130	57	95	222	160	377	460	274	39	-
GPROV536755	55	65	70	145	65	105	260	180	433	490	310	42	<a href="#">Download</a>
GPROV536785	85	75	83	162	73	127	329	190	527	586	340	67	<a href="#">Download</a>
GPROV5367120	120	95	95	208	91	147	399	238	646	687	428	123	-
GPROV5367150	150	105	108	238	102	169	410	275	688	727	485	168	-