




Green Pin® Tapered Pin ROV Release & Retrieve Shackle with D Handle – GPROV5361D

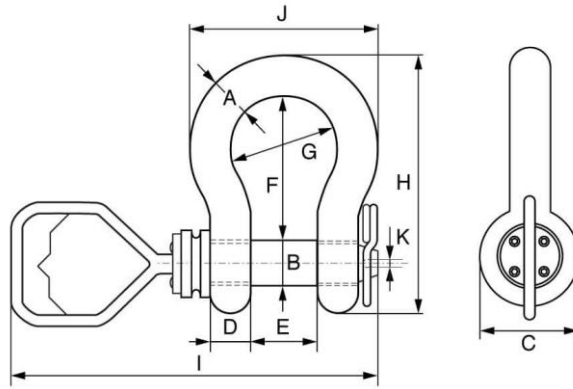

- Grade 8 polar quality alloy steel body and pin, quenched and tempered.
- White painted body and green painted pin.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -60°C up to +200°C.
- Supplied without wires; design your own wiring plan.
- Certification available **2.1** **3.1** **DoC**

P-5361D

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPROV5361D6.5	6.5	22	25	52	22	36	83	58	144	345	102	3.5	1.5
GPROV5361D9.5	9.5	28	32	66	28	47	108	75	185	381	131	5.5	3.16
GPROV5361D12	12	32	35	72	32	51	115	83	201	393	147	6.5	4.31

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPROV5361D17	17	38	42	88	38	60	146	99	249	417	175	8.5	7.43
GPROV5361D25	25	45	50	103	45	74	178	126	300	464	216	8.5	12.84
GPROV5361D35	35	50	57	111	50	83	197	138	331	484	238	8.5	18.15
GPROV5361D42.5	42.5	57	65	130	57	95	222	160	377	516	274	7.5	26.29
GPROV5361D55	55	65	70	145	65	105	260	180	433	545	310	7.5	37.6