
TECHNICAL DATA SHEET PBH30/31 XPLORER HARNESS TDS111



Checkmate Xplorer Harness
The Checkmate Xplorer harness has been developed for the adventure leisure market, but is also suitable for use in a wide range of industrial applications. The harness is designed to be more comfortable than a conventional harness for short periods of suspension and frequent loadings as common in adventure activities.





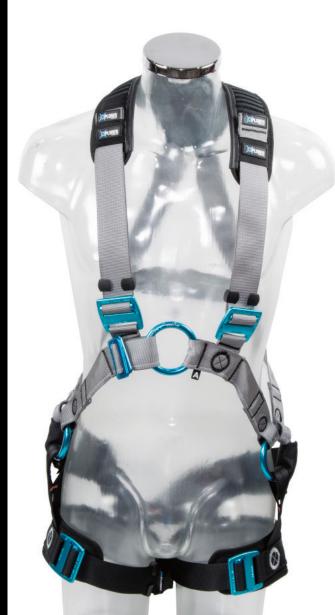

Alert Stitching

An intuative way for the harness to effectively communicate with the user or supervisor, the underside or covered stitch patterns are all in bright red. If you see red stitching this indicates incorrect donning.



Large Front Ring

Large front attachment for multiple connections. The key-way entry exit buckle with velcro security wrap ensures a safe final connection.



Curved Webbing

Unique curved webbing follows the contours of the body for a closer fit.



Limited Slip Rear D

Designed for multiple loadings with a small amount of vertical adjustment built in. Because the D is limited to max of 50mm adjustment it stops strap migration.



Hardware

Specifically designed to be ergonomically suited to the product functions, reducing wear on the webbing, allowing easy connections and critical pivot points give greater articulation.



Sub-Pelvic Assembly

Innovative construction for greater support and increased comfort when suspended.

PBH30/31 Xplorer Harness

Technical


Data Sheet

)S111

90 anssi

ordering information

Part No.	Description	Weight
₹PBH30	Adult Xplorer harness (Available in S, M/L, XL)	1.3kg(M)
₹PBH31	Junior Xplorer harness	0.9kg
₹PBH32	Adult Xplorer harness with no rear 'D' (Available in S, M/L, XL)	1.2kg
▼ RLAX-#-++	Adjustable rope lanyards	0.4kg

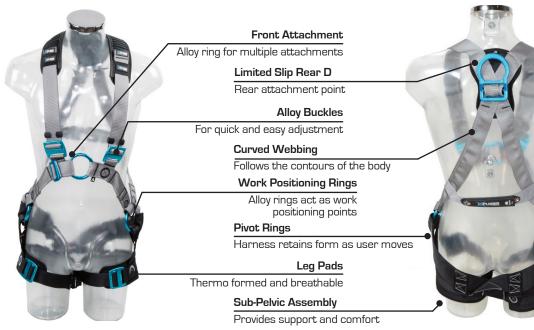





We understand the adventure leisure market is fast paced and highly demanding, therefore we have simplified the harness selection process. All PBH30 Xplorer harnesses come with a colour coded size tab located on the label pouch to quickly and confidently determine the harness size.

standards

- TEN 361:2002, EN12277:2007 Type A
- T EN 358:2000
- ANSI Z359.11-2014

product features

Limited slip rear D

Attachment points

Sternum attachment ring

Fittings

Alloy rings, D and buckles

Webbing

Polyester webbing - water repellent, UV resistant

User Weight

Adult Sizes (PBH30/32 Variants): 150kg maximum [Including tools and equipment] Child Sizes(PBH31 Variants): 40kg maximum [including tools and equipment].















PBH31 harnesses come with a neoprene printed label cover, in place of the label pouch found on PBH30 harnesses. The "Jr" print is large for fast identification of size.



Introducing our latest addition to the Xplorer range the RLAX, an adjustable rope lanyard that can be shortened or lengthened to suit the various requirements of each individual.



