


## APPLICATION

General purpose harness ensuring high degree of comfort and general mobility

## MODELES

Désignation	Code	Norme	Accrochage dorsal	Accrochage sternal	Accrochage thoracique	Accrochage latéral	Accrochage ombilical	STANDARD
			Accrochage antichute			Accrochage de maintien	Accrochage de suspension	
HT 56 S A XP	65332	EN 361	1	1	1			Boucles automatique
HT 56 M A XP	65342	EN 361	1	1	1			Boucles automatique
HT 56 XL A XP	65352	EN 361	1	1	1			Boucles automatique

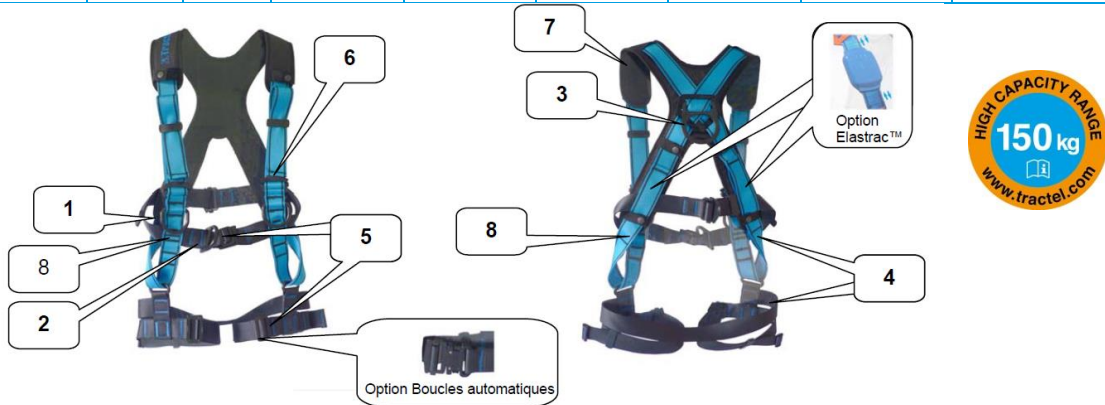

## Component & characteristic

The harnesses come in three sizes: S / M / XL. All of the harnesses come equipped with an X-Pad in their standard configuration

- 1 - Thoracic anchorage point: D-rings made of zinc-plated + black cathaphoresis treated steel
- 2 - Chest anchorage point: D-rings made of zinc-plated + black cathaphoresis treated steel
- 3 - Back anchorage point: 65 mm back D-ring made of zinc-plated + black cathaphoresis treated steel
- 4 - Webbing: Polyester, 45 mm, black and blue
- 5 - Closing buckles Flat buckles made of zinc-plated + black cathaphoresis treated steel or automatic buckles made of black anodised aluminium and stainless steel
- 6 - Adjustment buckles made of zinc-plated + black cathaphoresis treated steel
- 7 - X-Pad made of sealed closed-cell foam protected by a reinforced canvas cloth on the outer side and a honeycomb cloth on the inner side.
- 8 - Fall indicator on all anchorage points
- Weight: 1.8 kg

## Description

The HT56 is a wide-scale general purpose harness with three anchorage points: 1 chest anchorage point and 2 thoracic anchorage points.

Enhanced comfort is ensured by the back X-Pad, the mountaineering-type thigh straps and the linkage between the shoulder straps and thigh straps by connecting buckles.

The harness is very easy to slip on as it opens fully at the front with the X-Pad preserving the harness form. Putting on the harness is further facilitated through the use of automatic buckles available on option.

The harness is equipped with fall indicators for improved safety in use. The adjustment buckles cannot be removed.

## Options

**Elastrac™ units** : The two units enable elongation of the harness shoulder straps which match up with the user's body and stretch the webbing on each movement. The units ensure webbing elongation of up to 4 cm.

**Automatic closing buckles** : Automatic closing buckles are now used with the HT56 harness in place of the flat closing buckles

## CE certification

- n° 0082/352/160/11/13/332
- notified body : APAVE (N°0082)

## Standard

- EN 361