

WK32 - RescuePack™



User Instructions

**ONLY FOR USE BY COMPETENT PERSONS, WHO HAVE BEEN TRAINED ON THIS SPECIFIC KIT.
THESE UI ARE TO BE READ IN CONJUNCTION WITH UI FOR EACH ITEM OF THE KIT.**

LOWERING

(see overleaf for raising)

1. Select an unquestionably sound anchorage structure, above casualty.
2. Pass anchor strop **(A)** around anchorage and connect karabiner to screwlink.
3. Fit open hook to end of pole. With control-device half-threaded, extend pole to casualty **(B)**. Attach hook to harness and pull to release, ensuring hook gate closes fully.
4. Pull rope to casualty tight by pulling tail end through device **(C)**.
5. Fully thread control-device & lock-off by passing tail rope loop through the screwlink then around device **(D)**.
6. Check all connections, then cut casualty's fall arrest lanyard, with knife.
7. Gently lower casualty by holding tail rope and squeezing device handle into 'sweet spot' **(E)**.

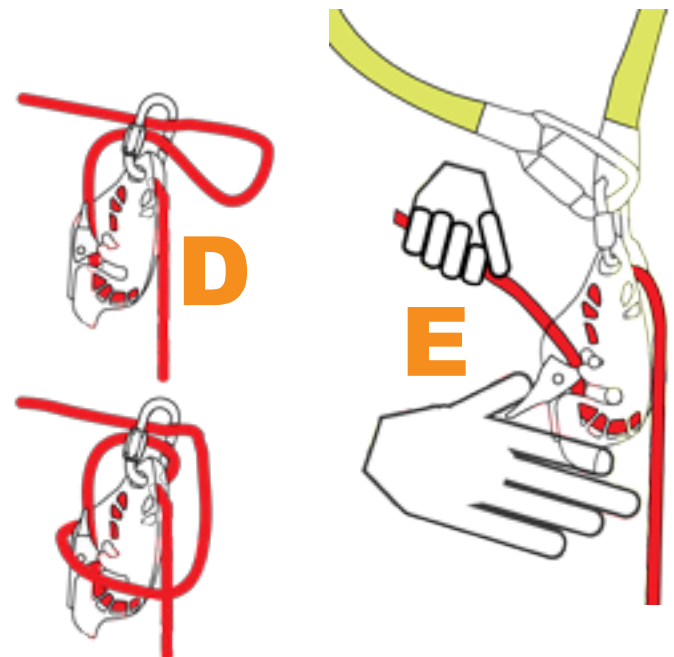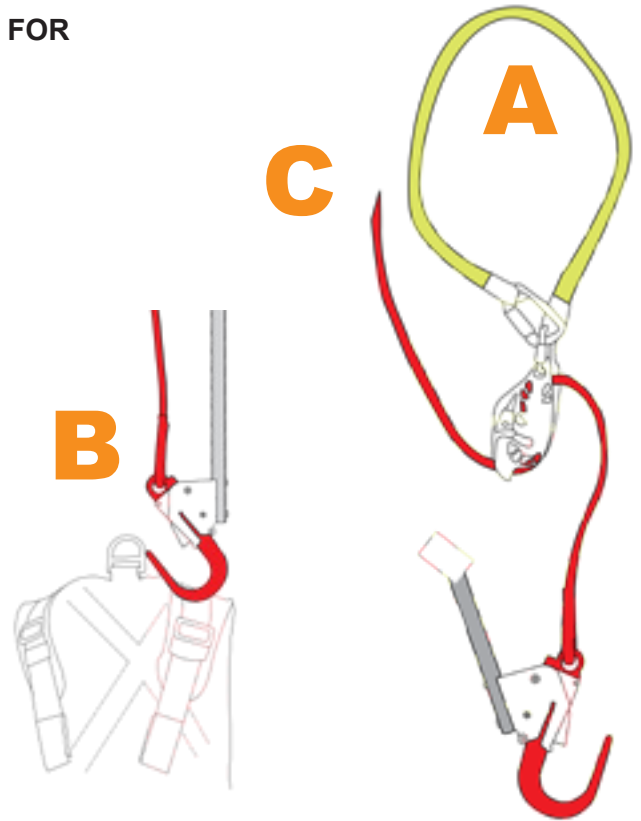

WK32 - RescuePack™

User Instructions

ONLY FOR USE BY COMPETENT PERSONS, WHO HAVE BEEN TRAINED ON THIS SPECIFIC KIT. THESE UI ARE TO BE READ IN CONJUNCTION WITH UI FOR EACH ITEM OF THE KIT.

RAISING

(see overleaf for lowering)

1. Select an unquestionably sound anchorage structure, above casualty.
2. Pass anchor strop **(A)** around anchorage and connect karabiner to screwlink.
3. Fit open hook to end of pole. With control-device half-threaded, extend pole to casualty **(B)**. Attach hook to harness and pull to release, ensuring hook gate closes fully.
4. Pull rope to casualty tight by pulling tail end through device **(C)**.
5. Attach hauling-device to casualty rope and thread tail rope through pulley as shown **(D)**.
DO NOT PUT DEVICE OVER EDGE
6. To raise casualty, pull tail rope **(E)**.
7. When hauling-device reaches control-device, slide hauling-device back down rope.
8. Repeat steps 6 & 7 to incrementally raise casualty as required.

